



MDA-10000A Slave and Master

MDA-10000A/ MDA-5000A Transistor Welding Power Supplies

Multiple connection of power supplies realizes high power welding at short time. MDA-10000A: Maximum twelve units connectable (One master and eleven slave units). Design your own system to add power supplies as much as you need to obtain enough power.


One master unit controls all connected units. It does not necessary to set the weld schedule at each unit anymore. A master unit is an only unit to need to be set and controls all slave units.

All units' current feedback. The current feedback feature controls to stabilize current collectively from all connected units.


Polarity switchable type: MDB-5000A. Alternate current flow from plus and minus side reduces Peltier effect and shapes nuggets uniformly. Best suited for series welding applications.

Three control types to choose from. Both MDA-10000A and MDB-5000A employ the following three types of control:

- Constant Current
- Constant Voltage
- Constant Current and Constant Voltage

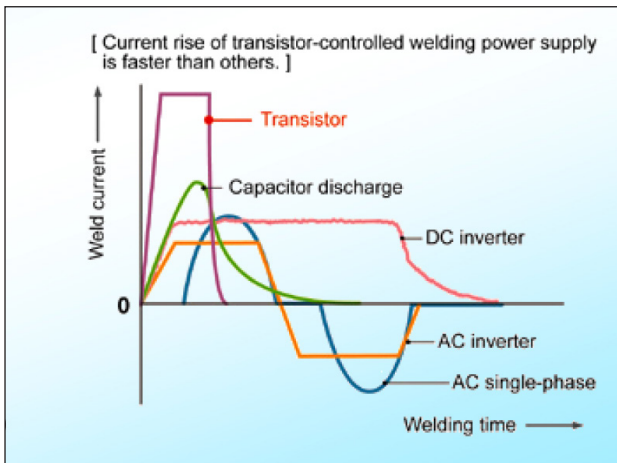

TYPICAL APPLICATIONS



Optical sensor parts



Crystal oscillators




Projection welding
of electronic components



TECHNICAL SPECIFICATIONS

Model		MDA-10000A	MDB-5000A
Type		Standard	Polarity switchable
Power requirements		Single Phase, 100 - 120 VAC or 200 - 240 VAC, 50/60HZ	
Power consumption		430 W max	
Feedback mode		Constant current / Constant voltage / Constant current and constant voltage	
Number of connectable unit		0 - 11 units	1 unit
Maximum current		10.0 kA (Master unit only)	10.0KA (One master and one slave units) Master unit of MDB-5000A cannot be used alone.
		30.0 kA (One master and two slave units)	
		40.0 kA (One master and three slave units)	
		50.0 kA (One master and four slave units)	
		60.0 kA (One master and five slave units)	
		70.0 kA (One master and six slave units)	
		80.0 kA (One master and seven slave units)	
		90.0 kA (One master and eight slave units)	
		100.0 kA (One master and nine slave units)	
		110.0 kA (One master and ten slave units)	
		120.0 kA (One master and eleven slave units)	
Time setting (31 schedules)	Maximum voltage	30 V	
	Squeeze time	0000 - 9999 ms	
	Pre-weld check	0.00 - 1.00 ms	
	Pre-weld check	2 ms (fixed)	
	Upslope	0.00 - 9.99 ms	
	Weld 1 / Weld 1 & 2	0.00 - 9.99 ms	
	Cooltime	0.00 - 9.99 ms	
	Downslope	0.00 - 9.99 ms	
	Hold time	0.00 - 9.99 ms	
Monitor display		Weld 1 & 2 (Average current/average voltage), Weld 1 & 2 (Peak current/peak voltage), Weld 1 & 2 (Average power/average resistance) Current, Voltage, Power, Resistance waveform, schedule number	

DRAWING

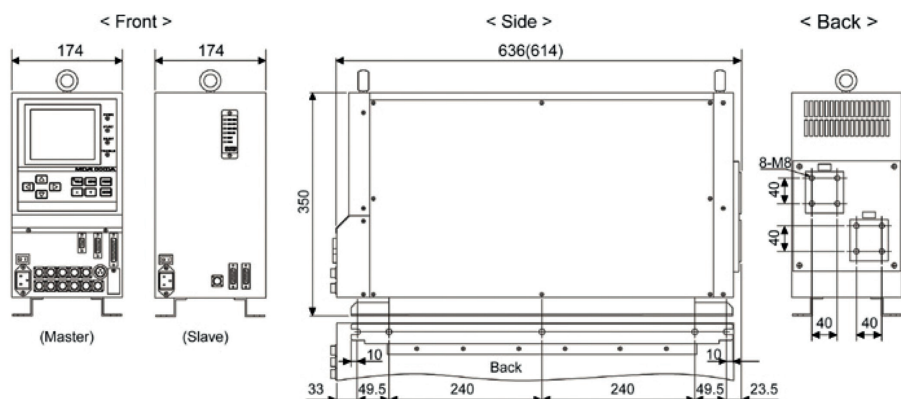

Lindberghstrasse 1 • DE-82178 Puchheim, Germany
T: +49 (0) 89 83 94 030 • Fax: +49 (0) 89 839403 68
info@amadamiyachi.eu • www.amadamiyachieurope.com
ISO 9001 Certified Company



EUROPE

Amada Miyachi Europe BV
Helmond, The Netherlands
T: +31 (0) 492 542 225
info@amadamiyachi.eu

Amada Miyachi Europe Kft.
Budapest, Hungary
T: +36 1 431 9927
info@amadamiyachi.eu

Amada Miyachi Europe
Derby, United Kingdom
T: +44 (0) 1332 361 238
info@amadamiyachi.eu

Amada Miyachi Europe
Saint Germain en Laye, France
T: +33 (0) 139 046 430
info@amadamiyachi.eu

Amada Miyachi Europe
Torino, Italy
T: +39 011 223 83 16
info@amadamiyachi.eu

Amada Miyachi Europe
Prague-West, Czech Republic
T: +420 251 512 157
info@amadamiyachi.eu

AMERICAS

Amada Miyachi America Inc.
Monrovia, CA, USA
T: +1-626-303-5676
info@amadamiyachi.com

Amada Miyachi do Brasil Ltda.
Sao Paulo, Brasil
T: +55-11-4193-1187
antonio.ruiz@miyachi.com

ASIA

Amada Miyachi Co., Ltd.
Noda, Japan
T: +81-4-7125-6177
sales@miyachi.com

Amada Miyachi Shanghai, Co., Ltd.
Shanghai, China
T: +86-21-6448-6000
zqzhang@msc.miyachi.com

Amada Miyachi Korea Co., Ltd.
Gyeonggi-do, Korea
T: +82-31-8015-6810
dykim@mkc.miyachi.com

Amada Miyachi Taiwan Co., Ltd.
Taipei, Taiwan R.O.C.
T: 886-2-2397-4778
keigaku@miyachi.com

Amada Miyachi (Thailand) Co., Ltd.
Samutprakarn, Thailand
T: +66-2751-9337-8
info@mtl.miyachi.com

Amada Miyachi Vietnam Co., Ltd.
Ho Chi Minh City, Vietnam
T: +84-8-3771-7972

Amada Miyachi India Pvt., Ltd.
Bangalore, Karnataka
info@miyachiindia.com

All data, images and text are subject to change at any time. Amada Miyachi Europe GmbH reserves the right to change, modify, delete and add technical specifications and product details at any time without prior notification. © 2015 Amada Miyachi Europe GmbH.

follow us on:

